ROVON POWER

RoveAGM

RA12-20

12V 20Ah


AGM Valve Regulated Lead Acid Battery

RoveAGM series is a general purpose battery with 8 years design life in float service. It meets with IEC, JIS, BS, GB/T and YD/T standards. With advanced AGM valve regulated technology and high purity raw material, the RoveAGM series battery maintains high consistency for better performance and reliable standby service life. It is suitable for UPS/EPS, telecom, power grid, medical equipment, emergency light and security system applications.



Specification	
Cells Per Unit	6
Voltage Per Unit	12
Capacity	20Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 5.4kg (Tolerance ±3.0%)
Internal Resistance	Approx. 16mΩ
Terminal	F3(M5) / F13-BP(M5)
Max. Discharge Current	200A (5 sec)
Short Circuit Current	820A
Design Life	8 years (Float charging)
Maximum Charging Current	6.0 A
Reference Capacity	C3 15.5Ah C5 17.4Ah C10 18.7Ah C20 20.0Ah
Standby Use Voltage	13.7V~13.9V @25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.6V~14.8V @25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ± 5°C
Self Discharge	ROVON Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional

Dimensions

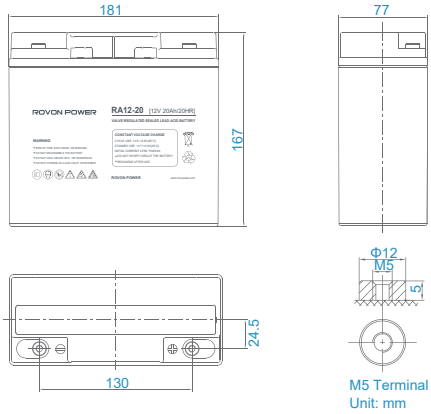

Length
181±2mm (7.13 inches)

Width
77±2mm (3.03 inches)

Height
167±2mm (6.57 inches)

Total Height
167±2mm (6.57 inches)

Terminal M5 Value
6-7 N*m

Terminal M6 Value
8-10 N*m

Terminal M8 Value
10-12 N*m


Constant Current Discharge Characteristics: A (25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	75.88	53.63	38.77	22.27	12.22	7.503	5.640	4.553	3.773	2.428	1.972	1.041
1.65V	70.56	50.68	37.06	21.38	11.80	7.263	5.466	4.430	3.675	2.401	1.948	1.025
1.70V	63.67	46.65	34.71	20.43	11.42	7.024	5.317	4.310	3.579	2.364	1.919	1.012
1.75V	57.04	42.70	32.30	19.53	11.00	6.778	5.159	4.199	3.489	2.331	1.893	1.000
1.80V	50.09	38.66	29.83	18.67	10.58	6.536	4.999	4.079	3.399	2.291	1.869	0.990
1.85V	39.75	31.59	24.75	16.08	9.488	5.988	4.621	3.791	3.170	2.151	1.760	0.940


Constant Power Discharge Characteristics: W/cell (25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	125.8	91.16	67.77	40.44	22.96	14.22	10.77	8.742	7.272	4.742	3.877	2.050
1.65V	118.3	87.80	65.75	39.23	22.30	13.83	10.48	8.537	7.110	4.699	3.835	2.021
1.70V	109.2	82.32	62.51	37.88	21.71	13.45	10.24	8.336	6.949	4.637	3.782	1.999
1.75V	100.0	76.71	59.01	36.58	21.04	13.04	9.981	8.154	6.798	4.582	3.737	1.977
1.80V	89.68	70.65	55.26	35.31	20.36	12.64	9.710	7.948	6.646	4.514	3.694	1.960
1.85V	72.68	58.76	46.51	30.72	18.37	11.64	9.016	7.415	6.218	4.247	3.482	1.863


Discharge Characteristics Curve

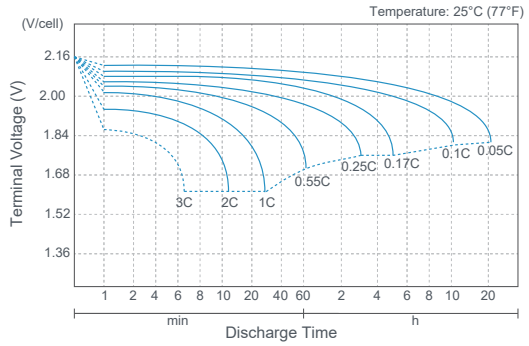


Charge Characteristic Curve for Standby Use

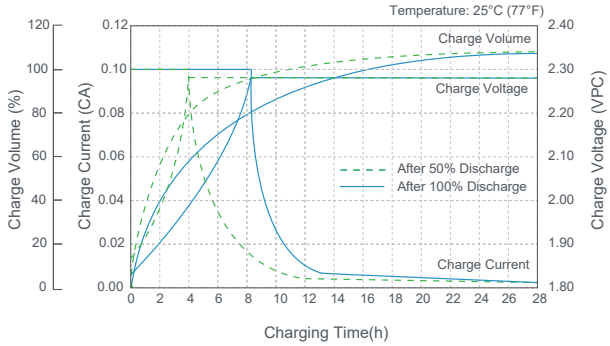


Cycle Life in Relation to Depth of Discharge

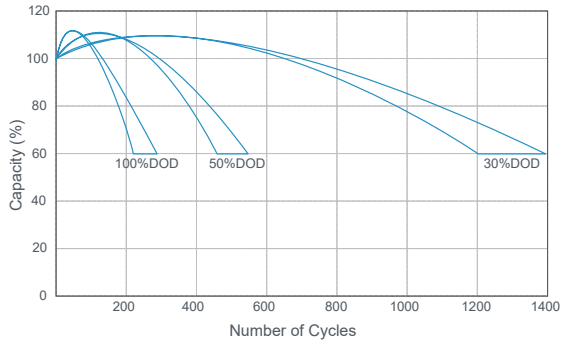


Relationship Between Charging Voltage and Temperature

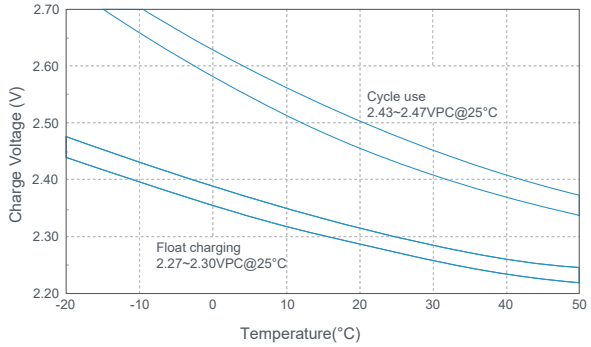


Temperature Effects on Capacity

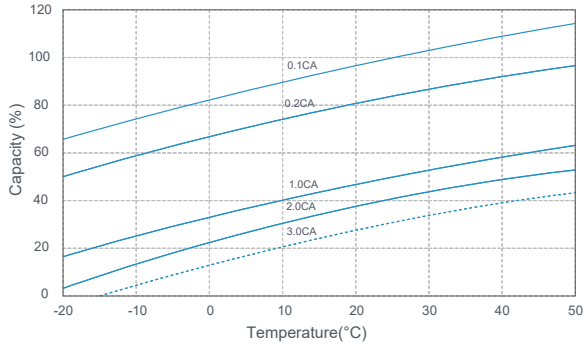


Storage Characteristics

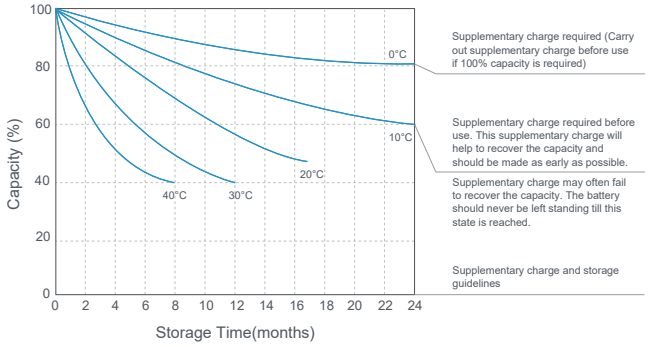

Effect of Temperature on Long Term Life

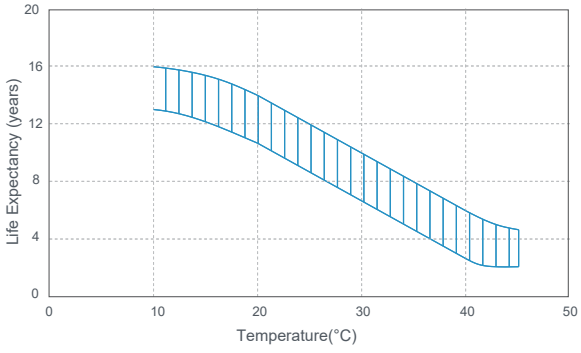

Life Characteristics Of Standby Use

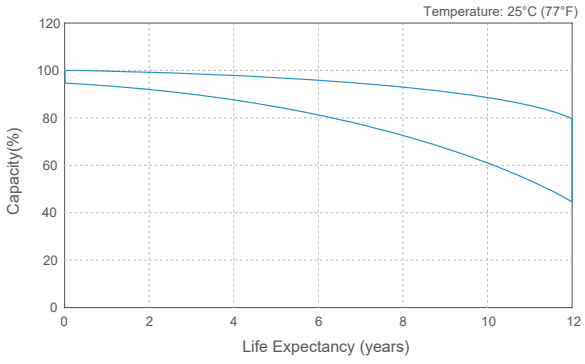

Specifications are subject to change without prior notice. ROVON reserves the right to interpret and update this information.